



**DK**

**Spændebånd**

**Bånd:** Rustfrit stål, bredde 5,5 mm, perforeret, (DIN 1.4016/AISI 430/SS2320).  
**Hus:** Galvaniseret stål.  
**Skrue:** Galvaniseret stål, med kærnv.  
**Tilspændingsmoment:** Rekommanderet 0,3 Nm, 1,5 in-lbs

**D**

**Schlauchschellen**

**Band:** Rostfreier Stahl, Breite 5,5 mm, perforiert, (DIN 1.4016/AISI 430/SS2320).  
**Gehäuse:** Galvanisierter Stahl.  
**Schraube:** Galvanisierte Schraube mit Kerbe.  
**Anziehmoment:** Richtwert 0,3 Nm, 1,5 in-lbs

**S**



**Slangklammer**

**Band:** Rostfrit stål, bredd 5,5 mm, perforeret, (DIN 1.4016/AISI 430/SS2320).  
**Hus:** Galvaniserat stål.  
**Skruv:** Galvaniserat stål, med spår.  
**Åtdragningsmoment:** Rekommanderat 0,3 Nm, 1,5 in-lbs

**GB**

**Gear clamps**

**Band:** Stainless steel, width 5,5 mm, perforated, (DIN 1.4016/AISI 430/SS2320).  
**House:** Electro zinc plated.  
**Screw:** Electro zinc plated, slotted.  
**Torque:** Recommended 0,3 Nm, 1,5 in-lbs

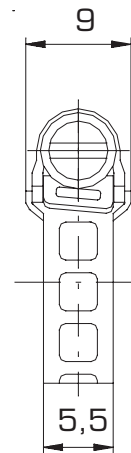

min.	Ø (mm)		Triscan ref.:	stk./pcs
		max.		
7	11		2105 001 706	10
9	14		2105 002 706	10

**DK**

**xxx** = emballagekode:  
**- 706** = æske á 10 stk.

**D**


**xxx** = Verpackungsnummer:  
**- 706** = Schachtel á 10 Stück

**S**


**xxx** = förpackningskod:  
**- 706** = ask med 10 st

**GB**

**xxx** = packaging code:  
**- 706** = 10-pc-box

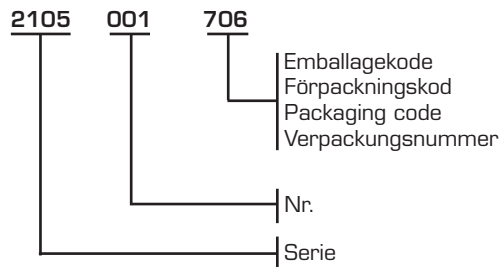

-706



**>address**

Triscan a/s  
Engmarken 11  
DK-8220 Brabrand  
Denmark

**>contact**

Phone +45 8622 5811  
Fax +45 8622 5877

**>contact**

email [auto@triscan.dk](mailto:auto@triscan.dk)  
[www.triscan.com](http://www.triscan.com)