

Rustfrit/syrefast stål - Rostfreier/säurebeständiger Stahl Rostfritt/syrafast stål - Stainless/acid-resisting steel

DK Spændebånd

Bånd: Syrefast stål, bredde 12,7 mm, perforeret, (DIN 1.4401/AISI 316).
Hus: Syrefast stål, (DIN 1.4401/AISI 316).
Skrue: Syrefast stål, sekskantet med kærøv 5/16"/8 mm, (DIN 1.4401/AISI 316).
Tilspændingsmoment: Rekommanderet 4,5 Nm, 40 in-lbs

D Schlauchschellen




Band: Säurebeständiger Stahl, Breite 12,7 mm, perforiert, (DIN 1.4401/AISI 316).
Gehäuse: Säurebeständiger Stahl, (DIN 1.4401/AISI 316).
Schraube: Säurebeständige Sechskant-Schraube mit Kerbe 5/16"/8 mm, (DIN 1.4401/AISI 316).
Anziehmoment: Richtwert 4,5 Nm, 40 in-lbs

S Slangklammer

Band: Syrafast stål, bredd 12,7 mm, perforerat, (DIN 1.4401/AISI 316).
Hus: Syrafast stål, (DIN 1.4401/AISI 316).
Skruv: Syrafast stål, sekskant 5/16"/8 mm med spår, (DIN 1.4401/AISI 316).
Åtdragningsmoment: Rekommanderat 4,5 Nm, 40 in-lbs

GB Gear clamps

Band: Acid-resisting steel, width 12,7 mm, perforated, (DIN 1.4401/AISI 316).
House: Acid-resisting steel, (DIN 1.4401/AISI 316).
Screw: Acid-resisting steel, 5/16"/8 mm slotted hexagon, (DIN 1.4401/AISI 316).
Torque: Recommended 4,5 Nm, 40 in-lbs

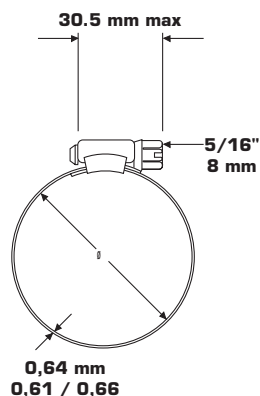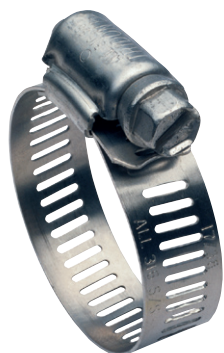

min.	Ø (mm) max.	Triscan ref.:	XXX = 706 stk./pcs	XXX = 102 stk./pcs
10	22	2665 006 xxx	10	
11	25	2665 008 xxx	10	500
14	27	2665 010 xxx	10	
14	32	2665 012 xxx	10	
18	38	2665 016 xxx	10	500
19	44	2665 020 xxx	10	
27	51	2665 024 xxx	10	
33	57	2665 028 xxx	10	
40	64	2665 032 xxx	10	
46	70	2665 036 xxx	10	
59	83	2665 044 xxx	10	
71	95	2665 052 xxx	10	
84	108	2665 060 xxx	10	
104	127	2665 072 xxx	10	
102	152	2665 088 xxx	10	
127	178	2665 104 xxx	10	

DK

xxx = emballagekode:
- **706** = æske á 10 stk.
- **102** = pakket i karton

D


xxx = Verpackungsnummer:
- **706** = Schachtel á 10 Stück
- **102** = Kartonverpackung

S

xxx = förpackningskod:
- **706** = ask med 10 st
- **102** = förpackad i kartong

GB

xxx = packaging code:
- **706** = 10-pc-box
- **102** = cartoned

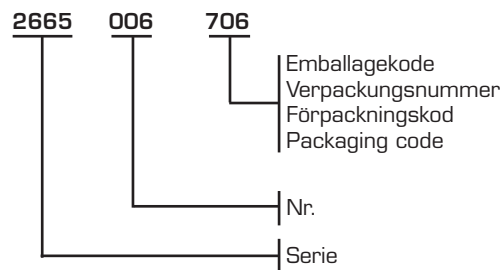

-102



-706



>address

Triscan a/s
Engmarken 11
DK-8220 Brabrand
Denmark

>contact

Phone +45 8622 5811
Fax +45 8622 5877

>contact

email auto@triscan.dk
www.triscan.com